

Feature and Benefits

- Write, read and erase device parameters
- Pluggable cable with end alligator clip to hold tight the terminals
- LCD display and functional keys
- Low current consumption for longer battery lifespan
- Circuit protection against clip
- Auto power-off within 3 minutes

Overview

The LF-X5932 is the general purpose programming tool use for LF-X family products. This unit is designed to suit for entering device parameters such as address, sensitivity, mode and types to meet the site situation and environmental requirements. In addition, the programmer is capable to read the previous encoded parameters to use for testing application and troubleshooting purposes.

The LF-X5932 is miniature and robust design makes it convenient to bring in the work place. The programmer is packed with twin 1.5V AA battery and cable, ready for usage once received. Easy to understand the display and with functional keys allow easy single-button activation of the common used parameters.




Technical Specification

Battery Required	2X1.5 AA / Included
USB Links	MICRO-USB Link for power supply
Current Consumption	Standby 0 μ A, In-use: 20mA
Protocol	LIFECO
Material / Colour	ABS / Grey Glossy finishing
Dimension / LWH	135 mm x 60 mm x30 mm
Humidity	0 to 95% Relative Humidity, Non condensing



Names and Location

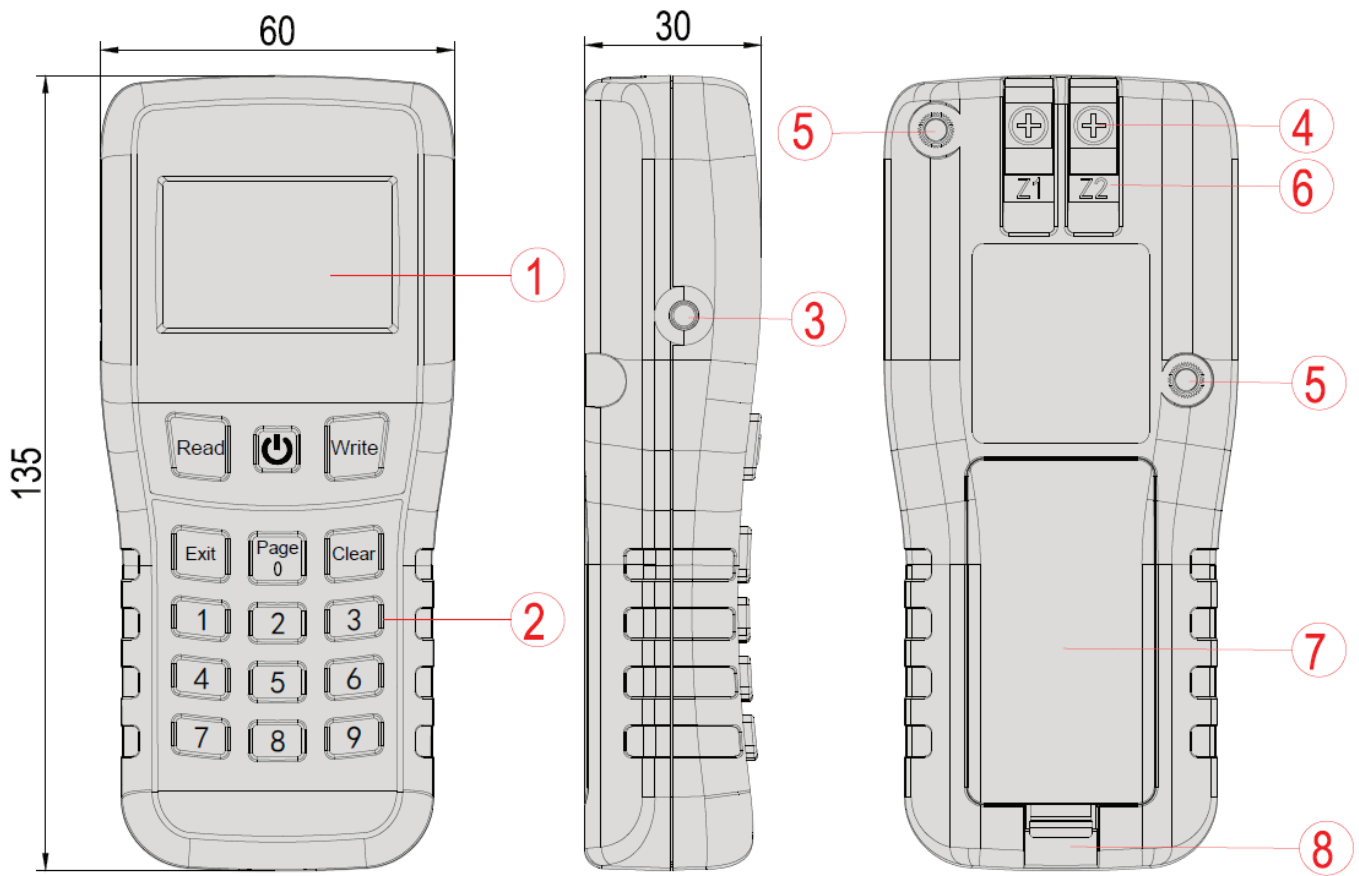

1	Data Display	16 Characters, four-segment display shows the device address, set types and mode and ID value
2	Function Key	Allow easy single-button activation of the common used parameters numeric values
3	Jack Socket	Location for male connector of programming cable
4	Cross Screw	Fixed metal contact sheet
5	Fixed Detector	Install the detector base with this
6	Metal Contact Sheet	Connection to signaling loop used for testing the loop wiring
7	Battery Cover	Location for programmer batteries
8	MICRO-USB Link	Connect MICRO-USB to Power Handheld for power supply