



UL/FM

Lifeco



Adjustable Type Indicator Post


Vertical type enables underground fire line valve to be operated at ground level with operating wrench.

Lifeco Adjustable Indicator post provides means to operate a buried or otherwise inaccessible valve. Also, the indicator post readily and clearly indicates whether the valve is open or shut.

All our indicator post have 1/2" PT plug to allow a supervisory switch to be installed. They are designed to operate valves 2 1/2" to 12" and has an adjustable range from 32" min to 56" max.

Extension Sleeve Length	Lbs. WGT	Trench Depth					Extension Rod Length
		4" Valve	6" Valve	8" Valve	10" Valve	12" Valve	
3'	252	3'-8"to5'-8"	4'-1"to6'-1"	4'-5"to6'-5"	4'-9.5"to6'-9.5"	5'-2"to7'-2"	
Turns to Open		10 1/2	12 1/2	16 1/2	20 1/2	24 1/2	

* The standard length of extension rod to be supplied is 6 feet. If the maximum trench depth is required, please specify the extension rod to be 7 feet on order.

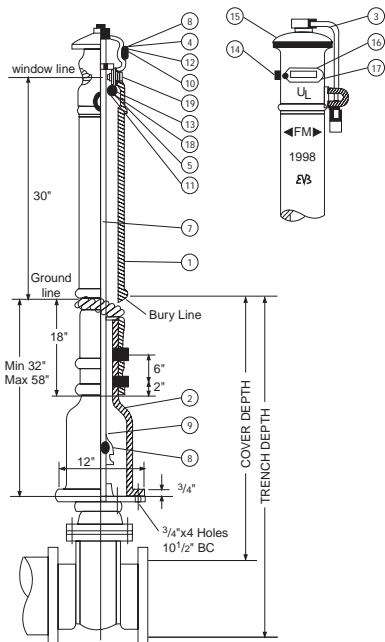

No.	Part	Material	Specification
1	Body	Cast Iron	ASTM A126-B
2	Extension Sleeve	Cast Iron	ASTM A126-B
3	Operating-Wrench	Ductile Iron	ASTM A-536
4	Operating Stem	Cast Bronze	ASTM B-62
5	Target Frame	Cast Bronze	ASTM B-62
6	Retaining Ring	Steel	SAE 1065-1090
7	Extension Rod	Mild Steel	ASTM A105-80
8	Socket	Cast Iron	ASTM A126-B
9	Cotter Pin	Brass	ASTM B-16
10	Nut	Steel	ASTM A307-B
11	Square Head Nut	Steel	ASTM A307-B
12	Hexagon Head Bolt	Steel	ASTM A307-B
13	Round Head Bolt	Steel	ASTM A307-B
14	Plug	Steel	ASTM A307-B
15	Sign Plate (Open Shut)	Steel	
16	Cap	Aluminium	ASTM A126-B
17	Window Frame	Cast Iron	ASTM B-62
18	Fixed Plate	Aluminium	
19	Window Glass	Plexiglass	

Lichfield Fire & Safety Equipment Co. Ltd

Suite 4, 2nd floor, Saturn Centre
Spring Road, Ettingshall
Wolverhampton WV4 6JX
United Kingdom.

Tel: +44 (0) 870 066 4401
Fax: +44 (0) 870 066 4402
E-Mail: info@lifeco-uk.com
Website: www.lifeco-uk.com

