



UL/FM

Lifeco



Gate Valve 3" to 6" Grooved Ductile Iron OS & Y Rising Stem


Model 722 G

FEATURES

- Meets or exceeds all requirements of AWWA C509.
- Outside Screw & Yoke Rising Stem.
- Epoxy Coated Interior/Exterior.
- Stem also available in Stainless Steel (SUS 304).
- Size 3"-4" made with bonnet, Size 6" made with separate yoke bolted to bonnet.
- H' and H1' denote longer stem to allow for tamper switch notch.

Dimensions (mm)												Wt	
Size	H	H1	L	D	D1	G	E	K	P	U	H'	H1'	Kg
3"	452	530	203	89	254	76	67	85	16	8	482	560	42
4"	464	566	229	114	254	102	94	110	16	10	494	595	49
6"	622	775	267	168	305	152	143	164	16	10	662	817	84

No.	Part	Material	Standard
1	Body	Ductile Iron	ASTM A536 Grade 65-42-12
2	Disc Rubber	Cast Iron Coated with EPDM	
3	Disc Nut	Cast Bronze	ASTM B-62
4	Taper Pin	Stainless Steel	SUS 304
5	Bonnet	Cast Iron	ASTM A126 Class B
6	Packing	Non-Asbestos	Commercial
7	Gland	Cast Bronze	ASTM B-62
8	Hexagon Head Bolt	Steel	ASTM A307-B
9	Gland Flange	Ductile Iron	ASTM A-536
10	Hexagon Nut	Brass	ASTM B-16
11	Square Head Bolt	Steel	ASTM A307-B
12	Stem	Brass	ASTM B-16
13	Yoke	Cast Iron	ASTM A126 Class B
14	Sleeve Nut	Ductile Iron	ASTM A536 Grade 65-42-12
15	Yoke Sleeve	Cast Bronze	ASTM B-62
16	Hand Wheel	Cast Iron	ASTM A126 Class B
17	Wheel Nut	Ductile Iron	ASTM A536 Grade 65-42-12
18	"O" Ring	EPDM	Commercial
19	Rubber Gasket	EPDM	Commercial
20	Hexagon Nut	Steel	ASTM A307-B
21	Hexagon Head Bolt	Steel	ASTM A307-B
22	Hexagon Nut	Steel	ASTM A307-B

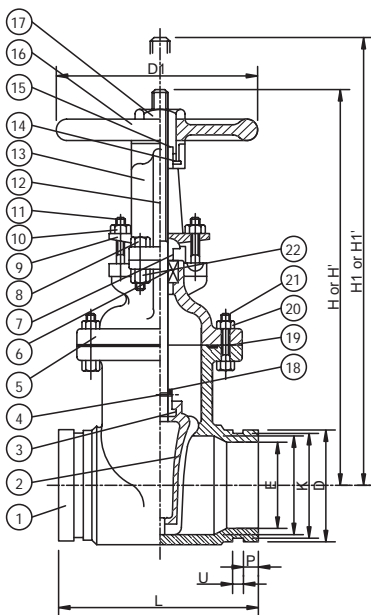

Lichfield Fire & Safety
 Equipment Co. Ltd
 Suite 4, 2nd floor, Saturn Centre
 Spring Road, Ettingshall
 Wolverhampton WV4 6JX
 United Kingdom.

Tel: +44 (0) 870 066 4401
 Fax: +44 (0) 870 066 4402
 E-Mail: info@lifeco-uk.com
 Website: www.lifeco-uk.com

