

# TECHNICAL DATA SHEET



for use by Architects & Engineers

## Weather Proof Manual Pull Stations

Model No: LE-HPS-SAH-WP



### Wiring Details

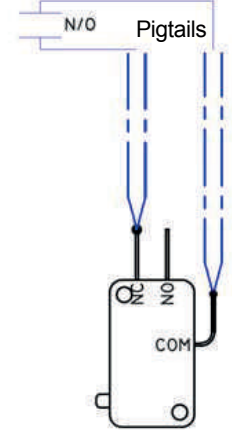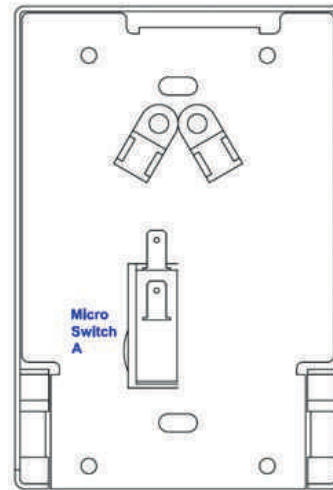

### Features

- Weatherproof Manual Pull Station
- 10 A, 120 VAC contacts
- Rugged die-cast aluminum housing and backbox
- Neoprene sealing gasket
- Corrosion-resistant construction
- KEY reset
- Lift and Latching pull-down lever
- Enclosed switch with glass rod (Included)
- Screw terminal connections

### Description

The LIFECO LE-HPS-SAH-WP Weatherproof Manual Pull Station is a UL Listed fire alarm initiating device suitable for applications requiring outdoor mounting of the manual fire alarm pull station. The LE-HPS-SAH-WP is appropriate for applications where the manual pull station may be subject to wet conditions.

The LE-HPS-SAH-WP consists of a die-cast aluminum back box (LE-HPS-BB), Neoprene sealing gasket and a special manual fire alarm box. The unit is a high quality pull station constructed entirely of nontoxic materials with a low profile and rounded edges to fit most design requirements. All components are pre-painted, or have plated surfaces to inhibit corrosion.

The latching pull-down lever on the LE-HPS-SAH-WP requires a hex key to reset it. This allows only authorized personnel to reset the manual pull station so that the origin of the alarm can be determined easily.

The LE-HPS-SAH-WP has one set of Normally Open contacts rated for 10A @ 120 VAC, making the device suitable for installations involving large current loads.

The LE-HPS-SAH-WP conforms with the Americans with Disabilities Act (ADA).

### Technical & Environmental Specification

Model	LE-HPS-SAH-WP
Contact	(1) Form A
Contact rating	10A @ 120VAC
Operating temperature	-30°F (-35°C) ~ 150°F (66°C)
HPS-BB dimension	1-3/4" Box