



Description

With a low profile sleek design, the LIFECO Sounder is ideal for standard installations and where aesthetics are an important consideration.

Suitable for conventional sounder circuits, notification alarm circuits and 2-Wire alarm systems. LIFECO Sounder's low operating current means it can easily be interfaced onto Analogue Addressable fire alarm systems with a suitable output module.

The LIFECO sounder can be flush mounted using a standard electrical single gang back box and surface mounted with the default back box.

Body colours available are Red and White.

Specification

Operating Voltage	20 - 28 V dc
Current Consumption	14 mA at 24 V dc
Weight	0.06 kg
Operating Temperature	-5°C to +50°C
Material	Fire rated ABS

Part Code


LF-1010RFX	Flush Mount, Red
LF-1010RSX	Surface Mount, Red
LF-1010WFX	Flush Mount, White
LF-1010WSX	Surface Mount, White

Features

- Aesthetically appealing design
- Sounder approved by UL to EN 54 Part 3
- Low current consumption, 6 mA
- Selectable Output, High: 92-96 dB(A) / Low: 86-90 dB(A)



Technical Drawing

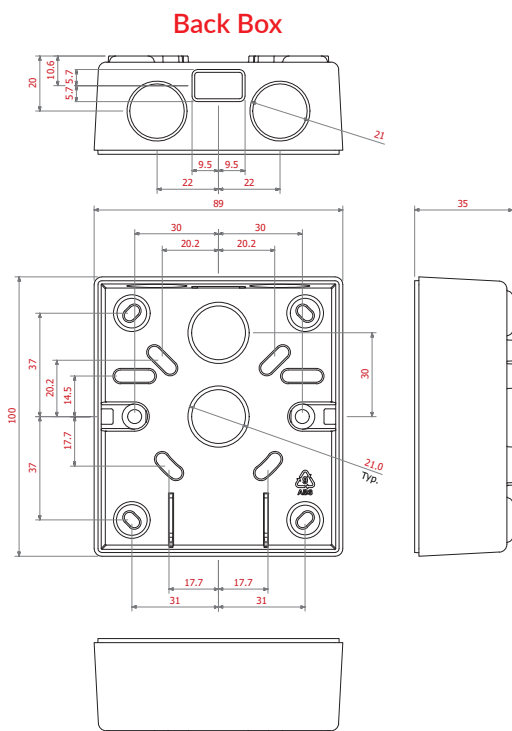

Sounder Unit

Dimensions: mm

