
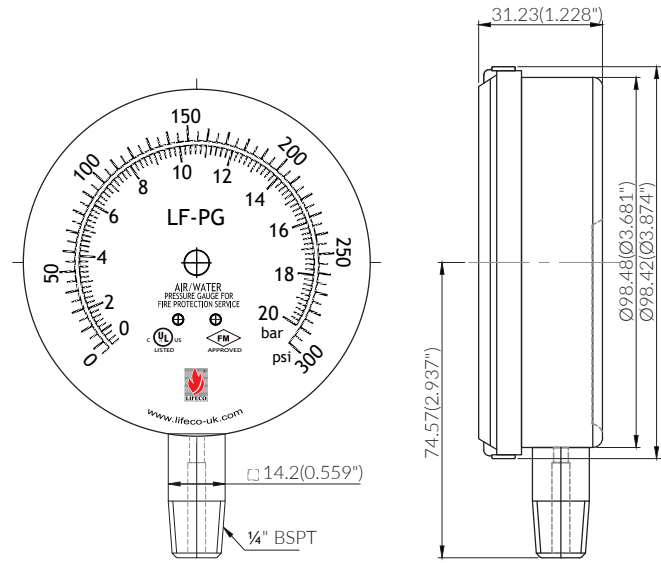


**Technical and Environmental Specification**

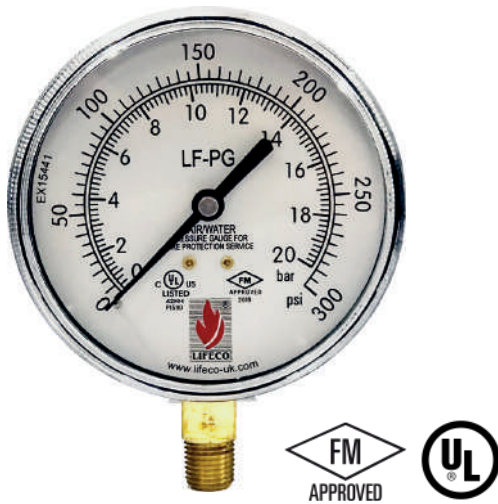

**Features**

- Specially designed for fire sprinkler systems
- Suitable for air and water media
- Corrosion resistant case
- Dual scales psi/bar
- Internal pointer over-travel stop
- ASME B40.100 compliant
- CRN registered
- 5 year warranty

**Technical and Environmental Specification**

<b>Dial</b>	3.5" (90mm), white aluminium with black & red markings
<b>Case</b>	Black plastic
<b>Lens</b>	Polycarbonate, threaded
<b>Socket</b>	Brass
<b>Connection</b>	1/4" BSPT standard, bottom
<b>Bourdon Tube</b>	Phosphor bronze
<b>Movement</b>	Brass
<b>Pointer</b>	Aluminium, black
<b>Welding</b>	Silver Alloy
<b>Working Pressure</b>	Maximum 75% of full scale value
<b>Ambient/Process Temperature</b>	-40°F to 150°F (-40°C to 65°C)
<b>Accuracy</b>	±3-2-3%
<b>Enclosure Rating</b>	IP52