


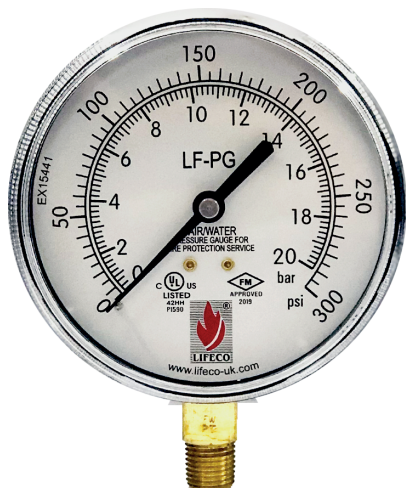

Features

- Specially designed for fire sprinkler systems
- Suitable for air and water media
- Corrosion resistant case
- Dual scales psi/bar
- Internal pointer over-travel stop
- ASME B40.100 compliant
- CRN registered
- 5 year warranty

Technical and Environmental Specification

Dial	3.5" (90 mm), white aluminium with black & red markings
Case	Black plastic
Lens	Polycarbonate, threaded
Socket	Brass
Connection	1/4" BSPT standard, bottom
Bour don T ube	Phosphor bronze
Movement	Brass
Pointer	Aluminium, black
Welding	Silver Alloy
Working Pressure	Maximum 75% of full scale value
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	±3 -2-3%
Enclosure Rating	IP52

Technical and Environmental Specification

