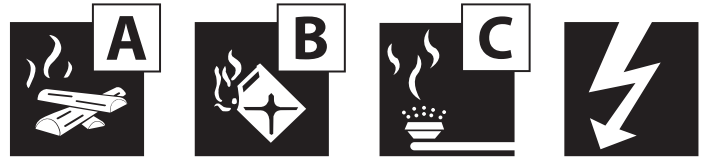



Classes of Fire

Description

Dry Powder Mobile Trolley Extinguishers models represent newly developed designs of pressurized fire extinguishers and are characterized by their high performance and rapid fire knock down capabilities.

Technical & Specification

Extinguisher Type	Stored Pressure					
Model	TPD25	TPD30	TPD50	TPDS75	TPDS100	TPDS150
Capacity	25kg	30kg	50kg	75kg	100kg	150kg
Weight	49 Kg	58.5 Kg	83.5 Kg	118 Kg	171 Kg	239 Kg
Height (mm)	855	990	1000	1120	1100	1100
Width (mm)	450	455	555	555	700	650
Depth (mm)	565	665	695	950	900	1050
Hose Length (mm)	3000	3000	5000	5000	5000	6500
Maximum Effective Range (m)	9	9	9	9	9	9
Duration of Discharge (Sec)	25-30	25-30	40-45	63-70	80-88	125-130
Extinguishing Agent	Dry Chemical					
Propelling Agent	N2					
Working Pressure	12-15 Bar					
Testing Pressure	30 Bar					
Coating	Electrostatic Polyester Powder					
Storage Temperature	-20°C to +60°C					

Extinguisher Type	Cartridge Operated					
Model	TPC25	TPC30	TPC50	TPCS75	TPCS100	TPCS150
Capacity	25kg	30kg	50kg	75kg	100kg	150kg
Weight	53 Kg	60 Kg	93 Kg	130 Kg	175 Kg	225 Kg
Height (mm)	855	990	1000	1120	1100	1100
Width (mm)	450	455	555	555	700	650
Depth (mm)	565	665	695	950	900	1050
Hose Length (mm)	3000	3000	5000	5000	5000	6500
Maximum Effective Range (m)	9	9	9	9	9	9
Duration of Discharge (Sec)	29-34	29-34	49-54	69-74	102-107	152-157
Extinguishing Agent	Dry Chemical					
Propelling Agent	CO2					
Working Pressure	12-15 Bar					
Testing Pressure	30 Bar					
Coating	Electrostatic Polyester Powder					
Storage Temperature	-20°C to +60°C					