

GENERAL DESCRIPTION

The model LF-ESC-1 flat escutcheons are in one-piece design for a decorative surface-mounted installation with certain pendent and horizontal sidewall sprinklers. They are intended for use in areas with finished ceilings or walls.

TECHNICAL DATA

Physical Characteristics


Thread size.....DN15 1/2" NPT

Material.....Stainless Iron

Net weight.....19g



DIMENSIONS

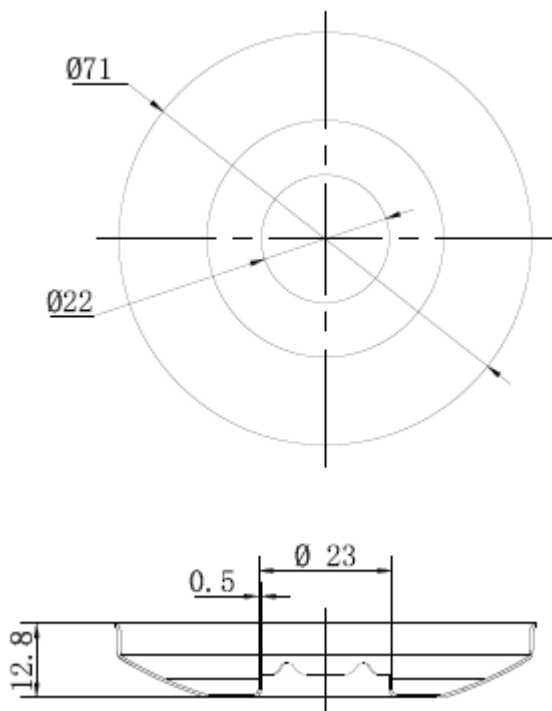

INSTALLATION

- Step 1:** Install the piping and cut the sprinkler nipple to position the opening in the ceiling or wall.
- Step 2:** Attach the flat escutcheon to the sprinkler by hand-turning it clockwise onto the sprinkler threads.
- Step 3:** Apply a small amount of pipe-joint compound or PTFE tape to the external threads of the sprinkler, avoiding build-up in the sprinkler inlet.
- Step 4:** Use a special sprinkler wrench to install the sprinkler into the coupling, avoiding over-tightening or damage to the sprinkler parts.
- Step 5:** Test the entire sprinkler system after installation, ensuring compliance with installation standards and proper tightening of the sprinkler.
- Step 6:** Remove protective caps and bulb shields after finishing the wall or ceiling work, ensuring no potential for damage to the sprinkler.