

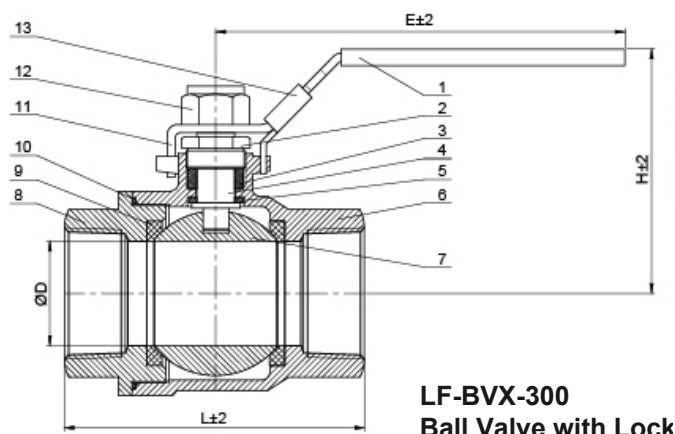


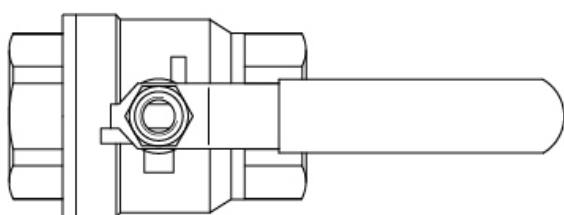


Technical Features

- Size Available (in. (mm)) for Model LF-BV-300: 1/2" (12.7), 3/4" (19.1), 1" (25.4), 1-1/4" (31.8), 1-1/2" (38.1), and 2" (50.8)
- Size Available (in. (mm)) for Model LF-BVX-300: 1/2" (12.7), and 3/4" (19.1)
- Working Pressure: 300 PSI (20.6 Bar)
- Design Standard: AP1608
- Test Standard: AP1598
- Valve supplied with ASME B1.20.1 (Standard Supply).
and BS EN 10226-1, or GB/T 7307 (Optional Supply) end connections with internal threads.
- Working Temperature Range: -20~180°C (-4~356°F)
- Approvals: UL and FM

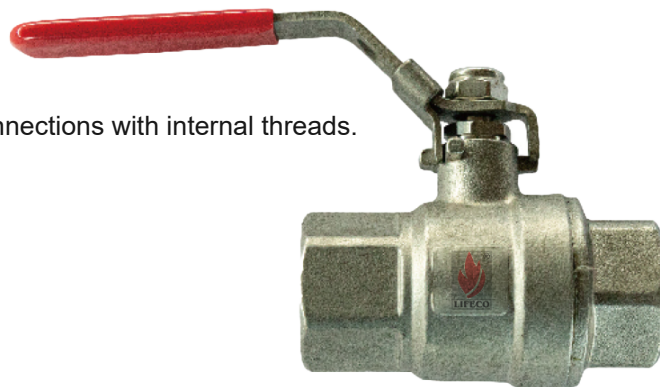

LF-BVX-300
Ball Valve with Lock

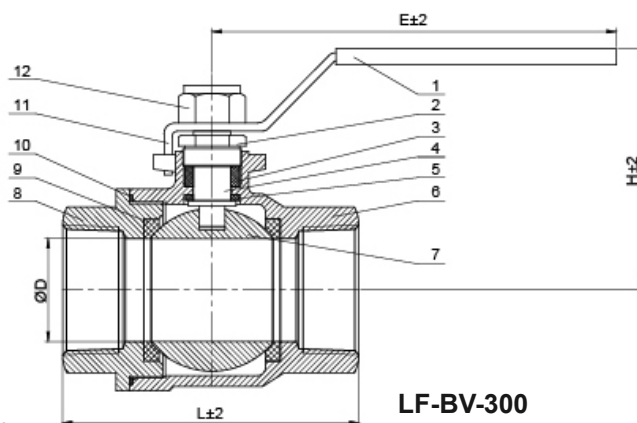

LF-BV-300
Ball Valve

Valve Material List

NO.	Name	Qty	Material
1	Handle sleeve	1	PVC
2	Gland	1	S20100/S30400/S31600
3	Packing	1	PTFE
4	Stem	1	S20100/S30400/S31600
5	Thrust washer	1	PTFE
6	Body	1	CF8/CF8M
7	Ball	1	CF8/CF8M
8	End cap	1	CF8/CF8M
9	Seat	2	PTFE
10	Gasket	1	PTFE
11	Handle(lock)	1	S20100/S30400/S31600/Steel
12	Nut	1	S20100/S30400/S31600
13	Lock Block	1	S20100/S30400/S31600/Steel

Dimensions

DN	INCH	D	L	E	H
15	0.5"	15	64.5	100	58
20	0.75"	20	77	100	62
25	1"	25	85	126	68
32	1.25"	32	100	126	75
40	1.5"	38	111	150	89
50	2"	50	124	150	97