

## 1. PRODUCT OVERVIEW

The **LF-ESA2** is a high-performance, addressable monitoring type emergency exit sign designed for reliability and compliance. Featuring energy-efficient LED technology and long-life LiFePO4 battery storage, it ensures clear guidance during power failures.



## 2. TECHNICAL SPECIFICATIONS

Feature	Specification
Product Model	LF-ESA2
Battery	LiFePO4 3.2V / 1200mAh
Emergency Duration	3 Hours
Charge Time	24 Hours
Input Voltage	DC 36V
Input Power	2.5W
Input Current	70mA
Operation Mode	Maintained / Non-Maintained
Emergency Power	0.95W

## 3. OPTICAL CHARACTERISTICS

Feature	Specification
LED Package Type	SMD 4014
LED Quantity	24 pcs
Luminance (DC 36V)	$\geq 8.71$ cd/m <sup>2</sup>
Emergency Luminance	$\geq 5.14$ cd/m <sup>2</sup>

## 4. STRUCTURAL & INSTALLATION

### Construction


- **Housing Material:** ABS (White)
- **Cover Material:** PMMA
- **Dimensions:** 348 x 264 x 42 mm
- **PCB Type:** FR-4 / CEM-1

### Protection & Classification

- **Degree of Protection:** IP20 (Suitable for Dry Locations)
- **Classification:** Class II
- **Operation Temperature:** 0 to 40 Degrees Celsius

### Mounting Options

- Ceiling Surface Mounting
- Ceiling Recessed Mounting
- Wall Mounting
- End Wall Mounting
- Ceiling Hanging Mounting

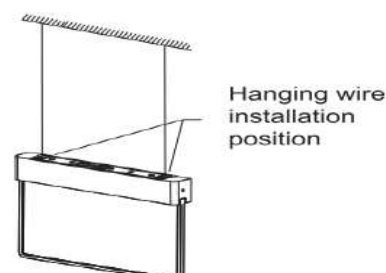

Hanging wire installation position

- *Note: Recessed & Hanging Mounting kit purchased separately*

## 5. CERTIFICATION & COMPLIANCE

- **Standard:** UL 924 Listed
- **ML File No:** E474559

LICHFIELD FIRE & SAFETY EQUIPMENT CO LTD (LIFECO)

*LIFECO Emergency Systems - Product Code: LF-ESA2 | Revision: 2026.01*