

Description

This gate valve is a resilient-seated NRS (Non-Rising Stem) type with mechanical joint ends, designed to provide a reliable seal and is approved for fire protection applications. It is built with durable materials to withstand high pressure.

Product Information

- Model: 3288-365-JJLF
- Approval: UL Listed & FM Approved
- Valve Standard: FM Class 1120/1130 and UL262

Performance Specifications


- Working Pressure: 365 PSI
- Working Temperature: 4°C to 70°C

Ends Connection

- Ends Connection Type: Mechanical-Mechanical Joints Ends Connection
- Standard Supply: ANSI
- Optional Supply: AWWA C111 or A21.11-00

Material List

No.	Part	Material	Specification
1	Body	Ductile Iron	ASTM A536 65-45-12
2	Disc	Ductile Iron+EPDM	ASTM A536 65-45-12
3	Disc Nut	Bronze	ASTM B62 C83600
4	Stem	Stainless Steel	SS304
5	Sealing Gasket	EPDM	--
6	Bonnet	Ductile Iron	ASTM A536 65-45-12
7	O-Ring	EPDM	--
8	Split Ring	Bronze	ASTM B62 C83600
9	O-Ring	EPDM	--
10	Post Flange	Ductile Iron	ASTM A536 65-45-12
11	Dust Cover	EPDM	--
12	Square Head	Ductile Iron	ASTM A536 65-45-12
13	Screw	Carbon Steel	8.8
14	Flat Washer	Carbon Steel	Galvanizing
15	Screw	Carbon Steel	8.8
16	Screw	Carbon Steel	12.9
17	Square Plug	Stainless Steel	SS304

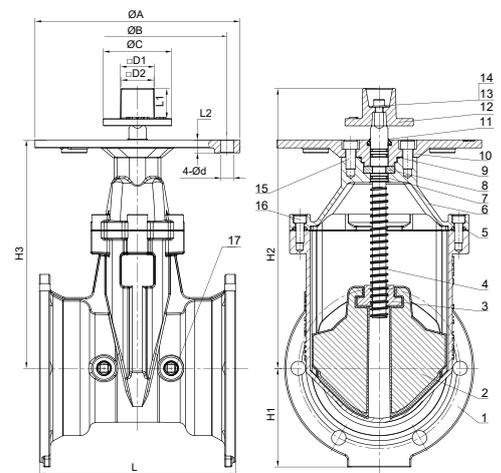

Dimensions

DN	INCH	ΦC(mm)	ΦA(mm)	□D1(mm)	□D2(mm)	L (mm)	L1 (mm)	L2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	4-Φa(mm)
80	3"	Φ102	305	51	49	241	45	18	105	293	224	4-Φ19
100	4"	Φ102	305	51	49	254	45	18	120	325.5	251	4-Φ19
150	6"	Φ102	305	51	49	292	45	19.5	148	420	343	4-Φ19
200	8"	Φ102	305	51	49	318	45	18	172.5	506	422.5	4-Φ19
250	10"	Φ102	305	51	49	375	45	18	204.5	610	534	4-Φ19
300	12"	Φ102	305	51	49	378	45	20	232	711	613	4-Φ19